




Mini-ITX Chassis with One 5.25" and One 3.5" Drive bays, support 1U single power supply

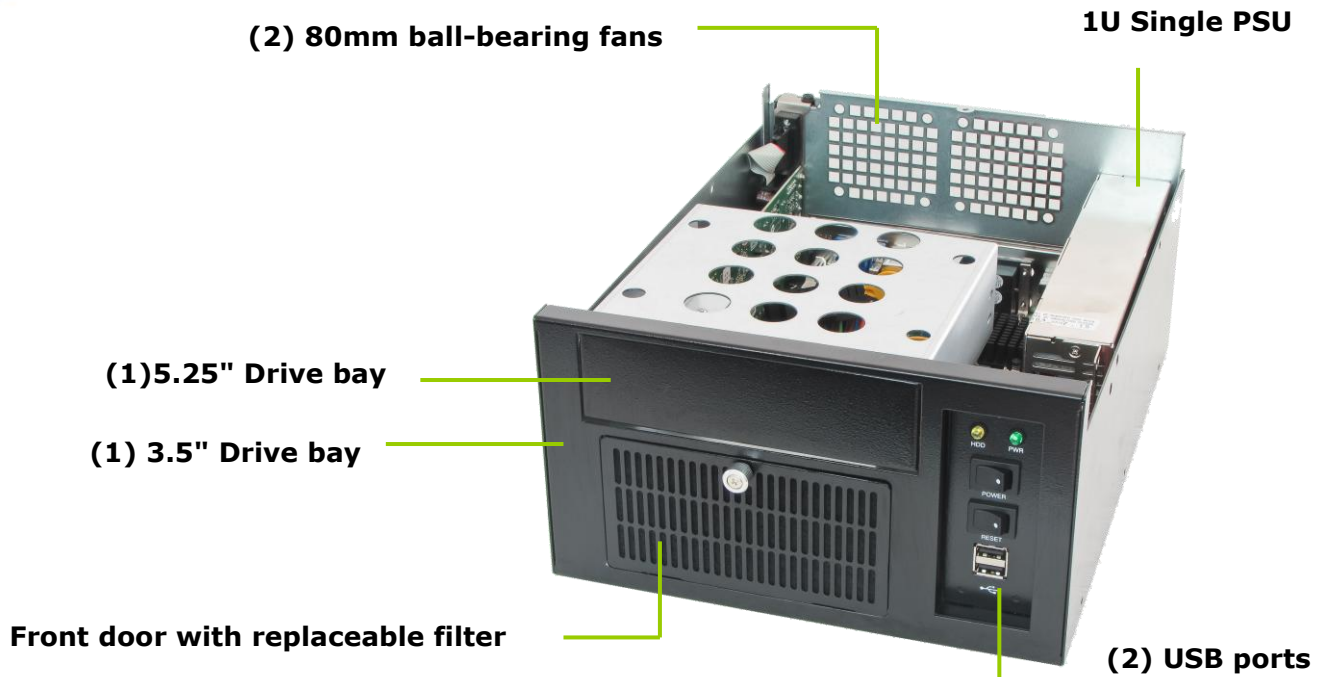

Introduction


The **WMC-302M** is designed to be an Industrial wall-mounted/ box system with one 5.25" external and one 3.5" internal Drive bays. The **WMC-302M** maintains a balanced internal temperature with two 80mm ball-bearing fans, front ventilation door with replaceable filter. **WMC-302M** offers robust solution for mounting your telecom, network, data center, imaging system, Server equipment in public area such as the CCTV surveillance recording or mobile broadcasting automation systems.

Features

- Heavy-duty Steel, Black
- Support Mini-ITX motherboard
- Front door with replaceable filter
- (1) 5.25" external drive bay
- (1) 3.5" internal drive bay
- (2) Front USB 2.0 ports
- (1) Full-height expansion slot
- (2) 80mm ball-bearing fans
- Support 1U single power supply



Mechanical Drawing

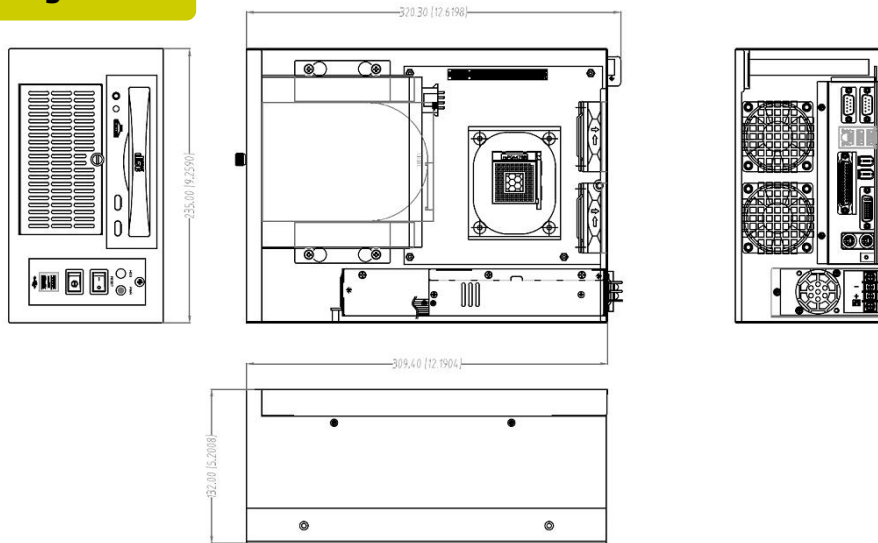

Construction

- Heavy-duty Steel, SECC 1.0t

Color

- Black

Board Support

- Mini-ITX motherboard

Drive Bays

- (1) 5.25" external drive bay
- (1) 3.5" internal drive bay

Expansion

- (1) Full-height expansion slot

Power Supply

- 1U Single power supply

Cooling System

- (2) 80mm ball-bearing fans

Ports

- (2) USB 2.0 on front panel

Switches

- On/Off Power Switch

Indicators

- Power On/Off LED
- HDD Activity LED

Dimensions (W x D x H)

- 235 x 320 x 132 mm
- 9.25 x 12.6 x 5.19 inches

Operating Temperature

- 0~55 °C

Net weight

- 3.2kg / 7.1lbs

Ordering Information

WMC-302M-BLK	Mini chassis for Mini-ITX MB with (1) 5.25" and (1) 3.5" Drive bays
WMC-302M-300W	Mini chassis for Mini-ITX MB with (1) 5.25" and (1) 3.5" Drive bays, with 300W PSU
WMC-302M-460W	Mini chassis for Mini-ITX MB with (1) 5.25" and (1) 3.5" Drive bays, with 460W PSU